08-25-00 A

JC878 U.S. PTO
08/23/00

ATTORNEY'S DOCKET NO. A0001-003013
EXPRESS MAIL LABEL NO.: EJ769728883US
DATE OF DEPOSIT: August 23, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC857 U.S. PTO
09/645871
08/23/00

BOX PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

TRANSMITTAL LETTER

Transmitted herewith for filing is a non-provisional patent application of:

Inventor: Eric C. Peters
80 Carleton Road
Carlisle, MA 01741

Joseph H. Rice
21 Belknap Street
Arlington, MA 02174

Title: MEDIA COMPOSER INCLUDING POINTER-BASED DISPLAY OF SEQUENTIALLY STORED SAMPLES

This application is a continuation of Ser. No. 09/489,330, January 21, 2000, which is a continuation of Ser. No. 08/873,577, June 12, 1997, Pat No. 6,018,337, which is a continuation of Ser. No. 08/045,646, April 9, 1993, which is a continuation-in-part of Ser. No. 07/866,829, Apr. 10, 1992, Pat. No. 5,355,450, all of which are herein incorporated by reference.

Enclosed are:

[X] A patent application totaling 21 pages total, including:
a specification including 12 pages
claims including 4 pages (claims 1-14)
an abstract (one page)
4 sheets of formal drawings (Figs. 1-5); and

[X] A return postcard

Respectfully submitted,

August 23, 2000
Dated

Kristofer E. Elbing
Registration No. 34,590
187 Pelham Island Road
Wayland, MA 01778
Telephone: (508) 358-2590
Facsimile: (508) 358-0714

Individual - Non Inventor

VERIFIED STATEMENT (DECLARATION) BY A NON-INVENTOR SUPPORTING A CLAIM BY ANOTHER FOR SMALL ENTITY STATUS

Applicant or Patentee: Hsien-Lung, TSAI
Serial or Patent Number:
Filed or Issued:
Title: BEAN SPROUTS BEDDING ARRANGEMENT

Docket #:
Group Art Unit:
Examiner:

I hereby declare that I am making this verified statement to support a claim by:

for small entity status for purposes of paying reduced fees to the United States Patent and Trademark Office with regard to the matter described in:

- ☐ The specification filed herewith, with the title as listed above.
- ☐ The patent application identified above.
- ☐ The PCT international patent application identified above.
- ☐ The Patent number identified above.

I hereby declare that I would qualify as an independent inventor as defined in *37 CFR 1.9(c)* for purposes of paying fees to the U.S. Patent and Trademark Office if I had made the above-identified invention.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license any rights in the invention to any person who would not qualify as an independent inventor under *37 CFR 1.9(c)* if that person had made the invention, or to any concern which would not qualify as a small business concern under *37 CFR 1.9(d)* or a nonprofit organization under *37 CFR 1.9(e)*. **Note:** Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities *(37 CFR 1.27)*.

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is listed below:

- ☐ no such person, concern or organization.
- ☐ each such person, concern or organization listed below.

FULL NAME: *ADDRESS:*	☐ Individual ☐ Small Business Concern ☐ NonProfit Organization

FULL NAME: *ADDRESS:*	☐ Individual ☐ Small Business Concern ☐ NonProfit Organization

☐ See attached sheet for additional person(s) concern(s) or organization(s).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate *(37 CFR 1.28(b))*.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine, or imprisonment, or both, under *section 1001 of Title 18 of the United States Code*, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which the verified statement is directed.

Name and Title in Organization Hsien- Lung, TSAI	*Date* Aug. 05, 2000
Address No. 2-10, Feng-Nian Rd., Yan-Bei Village, Yan-Pu Xiang, Pingdong County, Taiwan 907, R.O.C.	*Signature* Hsien-Lung, Tsai

A0521/7025
KEE:sjd:1895e

MEDIA COMPOSER INCLUDING POINTER-BASED DISPLAY OF SEQENTIALLY STORED SAMPLES

Cross Reference to Related Applications

This application is a continuation of Ser. No. 09/489,330, January 21, 2000, which is a continuation of Ser. No. 08/873,577, June 12, 1997, Pat No. 6,018,337, which is a continuation of Ser. No. 08/045,646, April 9, 1993, which is a continuation-in-part of Ser. No. 07/866,829, Apr. 10, 1992, Pat. No. 5,355,450, all of which are herein incorporated by reference.

Field of the Invention

The invention relates to the display of sequentially stored samples under the control of a pointer, and more particularly, to the use of a mouse as a jog or shuttle control for computer-based video and audio composition.

Background of the Invention

It is known to provide on a media player, such as a video tape recorder, a jog and/or shuttle knob. A shuttle knob allows the operator of the media player to adjust the speed of the player in either a forward or reverse direction. A jog control allows the user to move in forward and reverse directions through the medium on a still

frame by frame basis. Examples of prior art jog and shuttle controls include levers, knobs, concentric knobs, and knobs that change function when pressed upon axially or when another switch is pressed.

A common system is a three-button system, in which the user places three of his or her fingers on three buttons. The outer two fingers control the forward and reverse shuttle operations, which are much like fast forward scan and rewind scan buttons on a video tape recorder, except that multiple presses on the outer buttons in shuttle mode result in proportional increases in shuttling speed. For example, three presses will cause shuttling to take place at triple the shuttling speed. The central button is a stop button, and when it is held down, the outer buttons act as forward and reverse jog controls.

In computer-based media composition systems, a visual representation of a shuttle or jog control may be displayed and manipulated with a mouse. For example, an image of a slider or a film strip may be presented to the user. The user may then click on the slider with the mouse and drag the slider to perform either shuttle or jog operations. For example, the Quantel Harry system, available from Quantel Systems, Inc. of England, uses this type of metaphor. Generally, however, these systems require the user to be watching the screen so that they may locate the mouse pointer in a proper position on the slider.

Summary of the Invention

In general, the invention features selecting samples for presentation on an output device, such as a display or speaker, from a sequence of stored media samples, such as audio or video information. Position information is received from a pointing device, such as a mouse, and translated into direction and magnitude information. A second sample is then retrieved based on this position and magnitude information. This method may be used to implement jog or shuttle controls for a media composer, which may be provided with simulated "inertia" for ease of use.

A media composer according to the invention has the advantage of convenience and efficiency for the user. The user may perform composition operations using the pointing device and, without removing his or her hand from the pointing device, move to the next location on the medium to be composed. The user may also do so without looking at a control screen at all; he or she need only look at the material to be composed. These capabilities are provided inexpensively in a commonly-available pointing device, which may already be a part of the user's composing system. Also, the added inertia in both jog and shuttle modes, and playback speed limit in shuttle mode may prevent the user from getting lost in the material to be composed.

Brief Description of the Drawings

For a better understanding of the present invention, together with other and further objects, advantages and capabilities thereof, reference is made to the accompanying drawings, which are incorporated herein by reference and in which:

FIG. 1 presents a media composing workstation portion of a media composing system according to the invention; and

FIG. 2 is a system block diagram of the media composing system of FIG. 1.

Description of the Preferred Embodiment

Referring to FIG. 1, an exemplary media composition workstation according to the invention includes a computer output system 12 and computer input system 14. The output system may include one or more computer monitors 16 and one or more speakers 18. The input device may include a keyboard 20 and a pointing device 22, such as a mouse with one or more buttons 32. The display presented to the user on the monitor may be divided into a window 24 for variable speed playback, on-screen scrub controls 26, a timeline display 28, and a timeline position indicator 30.

Referring to FIG. 2, a media composing system 40 according to the invention may also comprise a mouse/scrub control module 42, a player module 44, a timeline module 46, and storage 48. The mouse/scrub control module is connected to the keyboard via a

data path 50 and to the pointing device by another data path 52. The player module 44 is connected to the mouse/scrub control module via a further data path 54.

The player module is also connected to receive information from the storage 48 via a bus 56, which may comprise several data lines 64, 66, 68. These data lines may be dedicated to different synchronized media channels, such as video and audio channels. The bus 56 is further routed to the timeline module 46, which also receives data from the player module via a data path 58. The player module may provide information to the moving picture window 24 via a picture information path 60, and may provide synchronized sound information to the speaker via a sound information data path 62. The timeline module supplies information to the timeline display 28 via a timeline information path 70.

It is observed that the routing of data and information may differ from the block diagram in an actual implementation. For example, the moving picture window and timeline display may be displayed on the same monitor and therefore share a data line. The pointer data might also be routed through the keyboard on its way to the mouse/scrub module or the keyboard might not be needed at all. Furthermore, the invention herein is applicable to composition operations on sound alone, and therefore the displays may not be necessary. Alternatively, the operations may be performed on images alone,

making speakers unnecessary.

The pointing device 22 may be one of several general purpose pointing devices available for computers. It may be a mouse supporting one or more buttons 32, or it may be a trackball, a light pen, a digitizing pad, touch pad, touch screen or the like. These types of pointing devices are commonly used to position a cursor on a screen of a computer system, or to receive position dependent data, such as that generated in a manual digitizing operation.

A system according to the invention may be developed using a variety of types of computer systems. In one embodiment, an Apple Macintosh and the "C" computer language were used, but naturally the invention should not be read to be limited to this particular platform. The mouse/scrub control module, player module, and timeline module may be implemented in software and/or hardware and may or may not be contained within the computer system. A software package entitled "Avid Media Composer", available from Avid Technology, Inc. of Tewksbury, Massachusetts includes these features. The storage may include a high-speed, high capacity internal magnetic hard disk drive. For further information on computer-based media storage and playback of video and audio information, see Peters et al., "VIDEO AND AUDIO TRANSMISSION SYSTEM AND METHOD", U.S. patent No. 5,045,940, issued September 3, 1991, herein incorporated by reference.

Storage 48 contains one or more sequences of

image and/or sound samples, and may also contain a sequence of composition information, such as editing and special effect information. The images may be stored in compressed form, allowing more images to be stored in a given amount of space. The sequences of images and sound are generally related in time much like the tracks of a multiple track type recording. For example, the storage may provide multiple logical connections including one or more for picture information 64, one or more for sound information 66, and one or more for composition information 68.

Referring to FIGS. 1 and 2, in composing material, the user interacts with the workstation portion of the system 10. Composition operations may include editing operations, special effects generation, dubbing operations, or the like. The composition to be worked on is displayed in an outline format in the timeline display. This outline format may include waveforms for sound information, or a series of representative pictures for image information such as video or film sequences. If a user desires to perform a composing operation on a particular scene he, or she may move the pointer 34 on the screen using the mouse and click on the portion of the timeline which shows the representative scene indicating the location at which the edit is to be performed. This is a relatively rough operation as computer displays will generally only allow display of a relatively low

number of images on a timeline at a meaningful size.

Once the user has located a rough location for the edit using the timeline position indicator, he or she may perform more precise jog and shuttle operations. To do so, the operator may use the pointing device to click on the on-screen controls 26 or may press a key 21 on the keyboard 20. This operation puts the workstation in shuttle mode. In this mode, when the user moves the mouse to the left, the workstation begins moving through the stored sequence of images at a rate determined by the distance through which the user has moved the mouse. This corresponds to a reverse shuttle operation, which may analogized to scan rewinding a video tape at a variable rate, with the rate dependent on the mouse displacement. Conversely, moving the mouse to the right will cause the sequence of images to be moved through in a forward direction in a forward shuttle operation.

The system 40 performs this shuttle operation by first obtaining position information from the pointing device through the data path 52. This operation may be performed by directly accessing the hardware associated with the pointing device, or by retrieving a coordinate stored by the computer's operating system. This mouse position information is then translated by the mouse/scrub control module into direction and magnitude information, which is transferred to the player module.

The magnitude information may be represented by

the X-coordinate of the current position of the mouse subtracted from the X-coordinate of the position of the mouse when the mode was entered, with this difference being multiplied by a scaling constant. The sign of this difference may be used as the direction information. The value of the constant will determine how sensitive the shuttle operation will be.

The direction and magnitude information can be transformed in this operation into numerical values which can be directly applied to the player module as commands. The direction information represents the direction of playback for the player module, and the magnitude information represents the speed of playback. These relayed commands directly cause the player module to display the sequences of images and/or sounds on the display at the appropriate rate.

In the shuttle mode, the system limits the maximum forward or reverse speed to three-times the sound speed (the sound speed is the speed at which a video sequence is played where the sound is played at the proper speed). This speed limiting feature prevents the user from getting lost by moving the mouse at a high rate of speed, such as by accidentally knocking the mouse across the desk.

Furthermore, in shuttle mode, "inertia" is added to the operation of the control. Rather than supplying information about mouse position changes directly to the player, changes in mouse position are moderated over a short period. In one

embodiment this is done by responding to changes in mouse position by providing a smaller corresponding change in speed to the player module and gradually increasing that change in speed to the full change in speed indicated by the mouse. For example, if the user were to double the distance of the mouse from its starting position, the mouse scrub control module might convey a 50% increase to the player module, followed closely by a 75% increase, and then a 90% increase, and finally a 100% increase. It has been found that this inertia enhances the ease of use and efficiency of use of the apparatus.

In shuttle mode, the system also has a small threshold value below which no shuttle operation takes place. This prevents the player from playing back at extremely slow speeds which are of little use and are sometimes found to be uncomfortable to the user. Values on the order of a 1% threshold have been found to be satisfactory.

The user may also use a jog mode for the workstation. Jog mode is similarly controlled by the position of the mouse, but advances from still frame to still frame within the sequence of images, rather than adjusting the speed of playback of the images. In jog mode, the distance the mouse travels from its starting point relates to the offset within the sequence of frames between the current position and the position to be displayed.

To enter jog mode from shuttle mode, the user may simply press and hold the mouse button 32. This

stops the action in the display window and subsequent motion of the mouse will constitute jogging operations. Other methods for entering the jogging mode are possible, such as keyboard keys 21. Similarly, the user may exit the jog mode by one of these methods, or by double clicking on the mouse button 32. Releasing the mouse button while in jog mode will return the user to shuttle mode, and with the current mouse position as the starting position at zero play speed.

In the jog mode, the mouse scrub control module receives position information from the pointing device and translates it into a different kind of direction and magnitude information. The mouse scrub control module constantly monitors the mouse and performs velocity calculations based on the position information of the mouse over time. The resulting velocity information may be supplied directly to the player module, after it is adjusted by a constant. By making the speed of the player proportional to that of the mouse, the player module will track the mouse position.

Inertia may also be added to the jog operations in a manner similar to that disclosed above in connection with the shuttle mode. This is particularly useful in connection with sound information, as it makes sound playback more regular during a jog operation.

It is noted that the timeline moves during both jog and shuttle operation and that this provides

feedback to the user in these operations. This feedback enhances the ease of use of the workstation operations and prevents the user from getting lost. Also, the user or system designer may adjust the constants determining the sensitivity of the jog and shuttle controls and the inertia, threshold and maximum speeds in the shuttle mode. This allows the user or designer to customize the "feel" of the workstation.

While there have been shown and described what are at present considered the preferred embodiments of the present invention, it will be obvious to those skilled in the art that various changes and modifications may be made therein without departing from the scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. A method of selecting samples for presentation on an output device from a sequence of stored media samples, comprising the steps of:

presenting a first sample retrieved from a current position in the sequence on the output device,

receiving position information from a pointing device,

translating the received position information into direction and magnitude information,

retrieving a second sample stored at a position in the sequence that is offset from the current position by an amount related to the magnitude information and in the direction indicated by the direction information, and

presenting the second sample on the output device.

2. The method of claim 1 wherein the samples in the sequence are each stored images, wherein the output device comprises a display device, and wherein the steps of presenting the first and second samples respectively include displaying first and second one of the images on the display device.

3. The method of claim 1 wherein the samples in

the sequence are each stored sound samples, wherein the output device comprises an audio device and wherein the steps of presenting the first and second samples respectively each include playing the first and second audio samples on the audio device.

4. The method of claim 1 wherein the step of translating the received position information translates the position indicated by the pointing device into a playback speed for successively playing back samples in the sequence to implement a shuttle control.

5. The method of claim 4 wherein said step of translating further includes the step of only translating the received position into a playback speed if the received position falls above a predetermined threshold.

6. The method of claim 4 further including the step of limiting the playback speed.

7. The method of claim 1 wherein the step of translating the received position information translates the position indicated by the pointing device into a sample position within the sequence to implement a jog control.

8. The method of claim 7 wherein the step of translating moderates the effect of changes in

velocity of the pointing device on the rate of playback of the samples.

9. The method of claim 7 wherein the step of translating includes determining the velocity of the pointing device and translating it into a playback speed for successively playing back samples in the sequence.

10. The method of claim 7 wherein the step of translating moderates the effect of changes in velocity of the pointing device on the rate of playback of the samples.

11. The method of claim 1 wherein the pointing device is a mouse.

12. The method of claim 1 further including, before the step of presenting the first sample, determining the current position using a coarse timeline control.

13. The method of claim 1 further including the steps of, after an exit command, using the information from the pointing device to perform other position-sensitive operations.

14. A media composing system comprising:
storage for a sequence of samples,
a pointing device,

a control module responsive to the pointing device, for translating position information from the pointing device into player module commands including direction and magnitude information,

a player module responsive to the control module and the storage, for playing back selected ones of the samples in response to the player module commands, and

an output device responsive to the player module for presenting the samples to a user.

Abstract of the Disclosure

MEDIA COMPOSER INCLUDING POINTER-BASED DISPLAY OF SEQUENTIALLY STORED SAMPLES

Method and apparatus for selecting samples for presentation on an output device, such as a display or speaker, from a sequence of stored media samples, such as audio or video information. Position information is received from a pointing device, such as a mouse, and translated into direction and magnitude information. A second sample is then retrieved based on this position and magnitude information. This method may be used to implement jog or shuttle controls for a media composer, which may be provided with simulated "inertia" for ease of use.

Docket: Pending

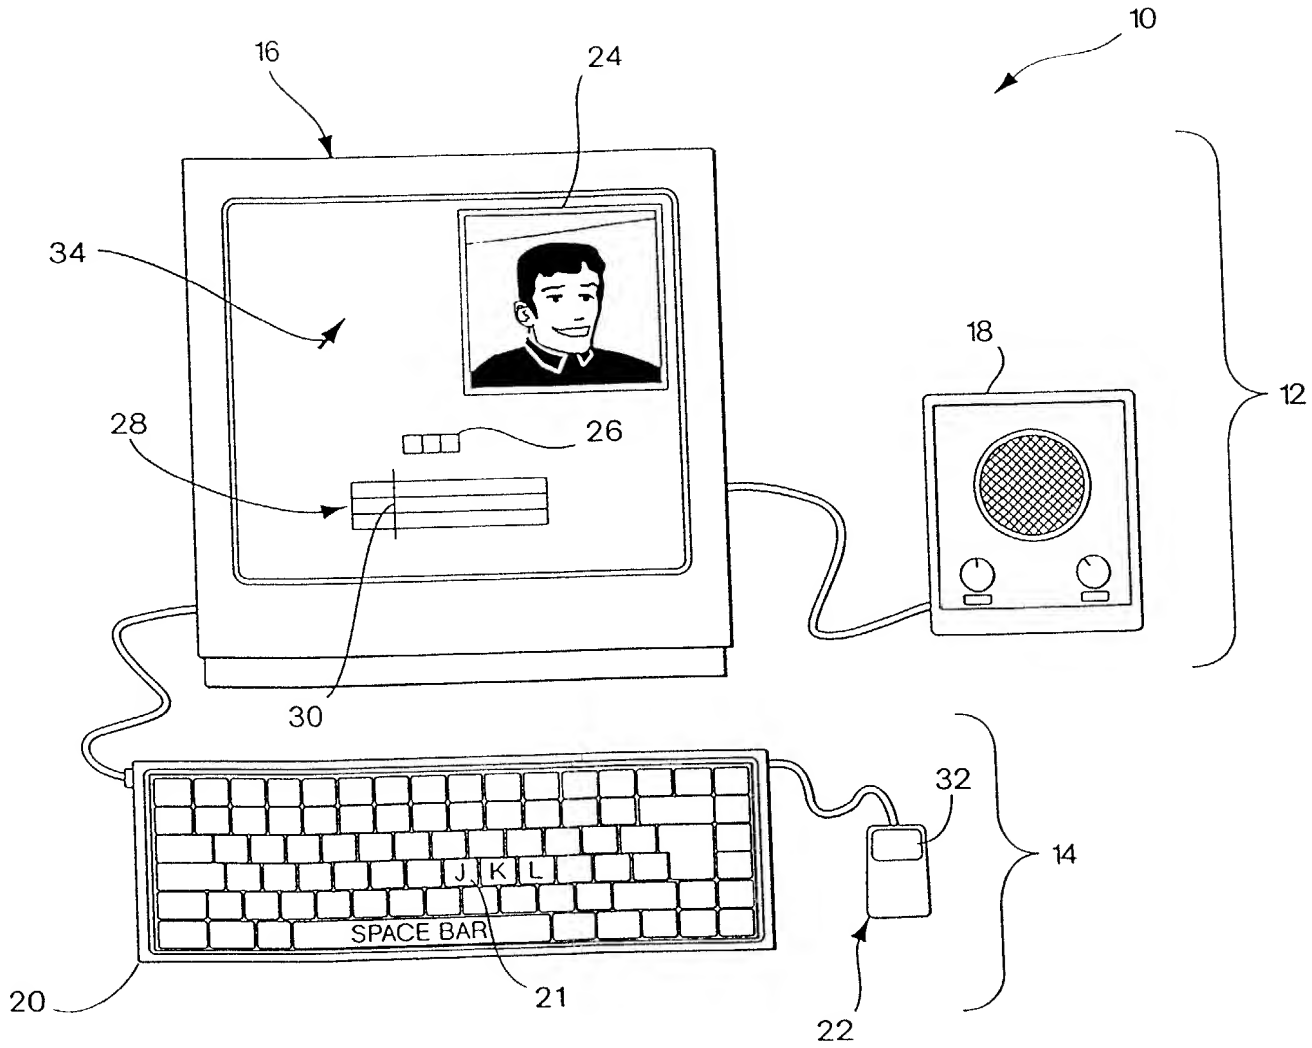

Fig. 1

09626965 "Z6051502

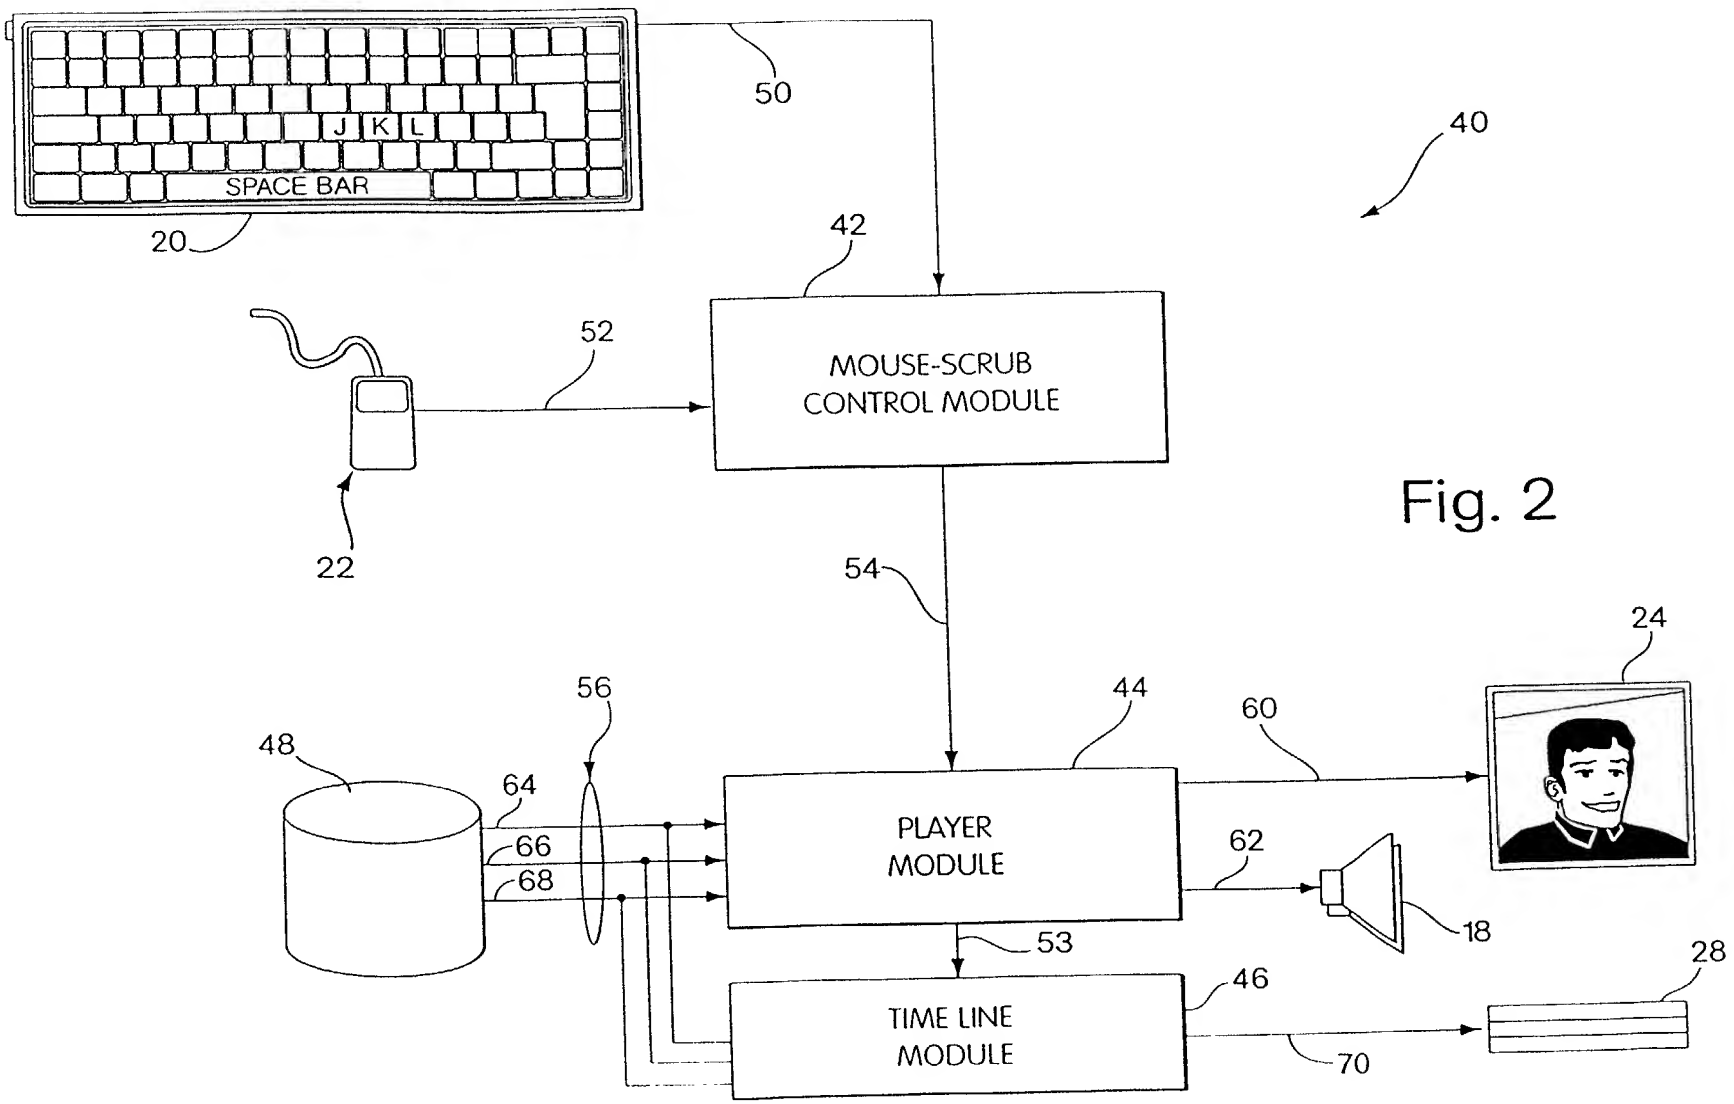

Fig. 2

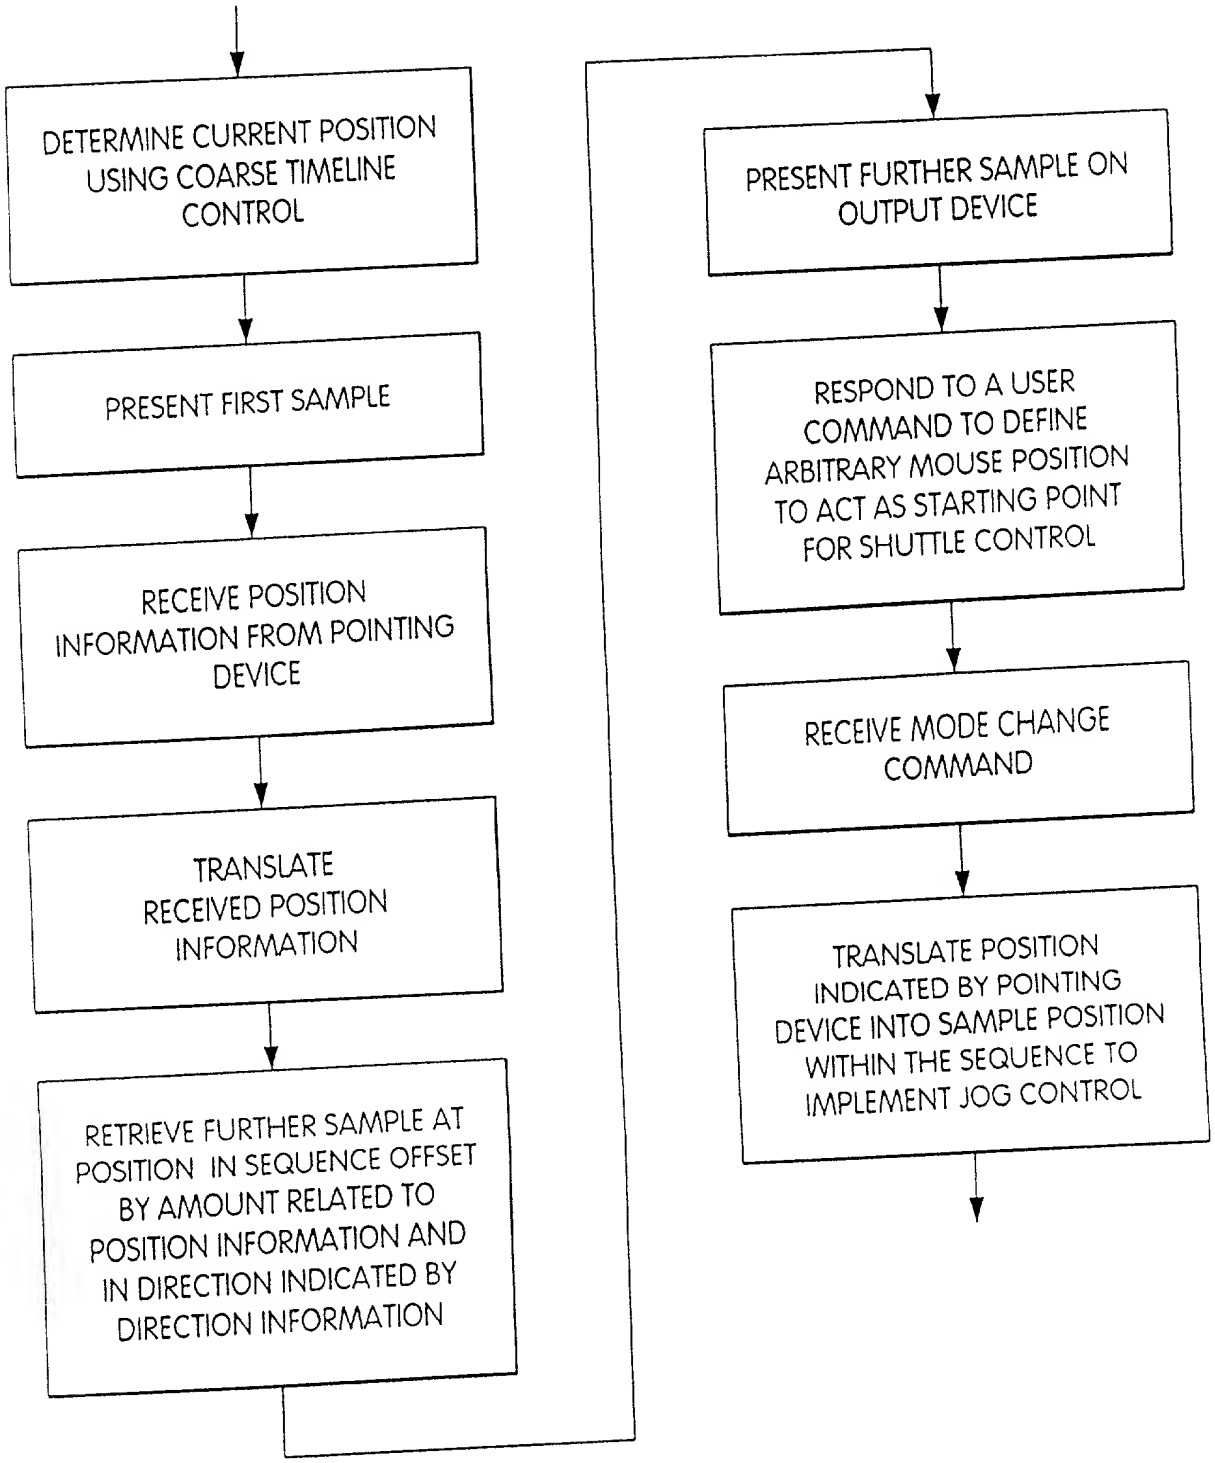
DETERMINE CURRENT POSITION USING COARSE TIMELINE CONTROL
PRESENT FIRST SAMPLE
RECEIVE POSITION INFORMATION FROM POINTING DEVICE
TRANSLATE RECEIVED POSITION INFORMATION
RETRIEVE FURTHER SAMPLE AT POSITION IN SEQUENCE OFFSET BY AMOUNT RELATED TO POSITION INFORMATION AND IN DIRECTION INDICATED BY DIRECTION INFORMATION
PRESENT FURTHER SAMPLE ON OUTPUT DEVICE
RESPOND TO A USER COMMAND TO DEFINE ARBITRARY MOUSE POSITION TO ACT AS STARTING POINT FOR SHUTTLE CONTROL
RECEIVE MODE CHANGE COMMAND
TRANSLATE POSITION INDICATED BY POINTING DEVICE INTO SAMPLE POSITION WITHIN THE SEQUENCE TO IMPLEMENT JOG CONTROL

Fig. 3

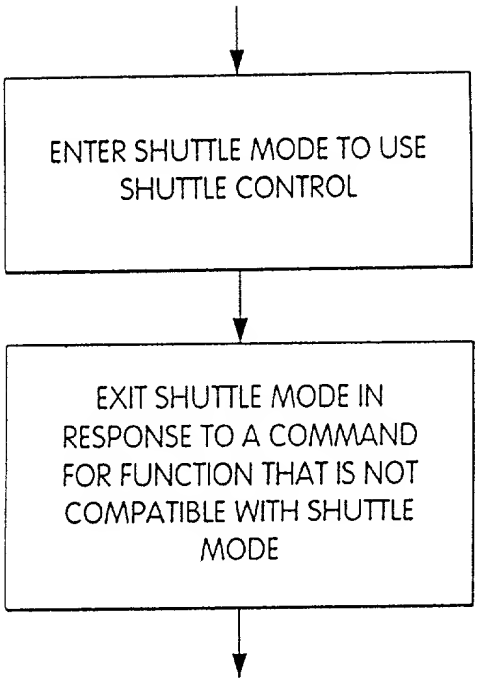
ENTER SHUTTLE MODE TO USE SHUTTLE CONTROL
EXIT SHUTTLE MODE IN RESPONSE TO A COMMAND FOR FUNCTION THAT IS NOT COMPATIBLE WITH SHUTTLE MODE

Fig. 4

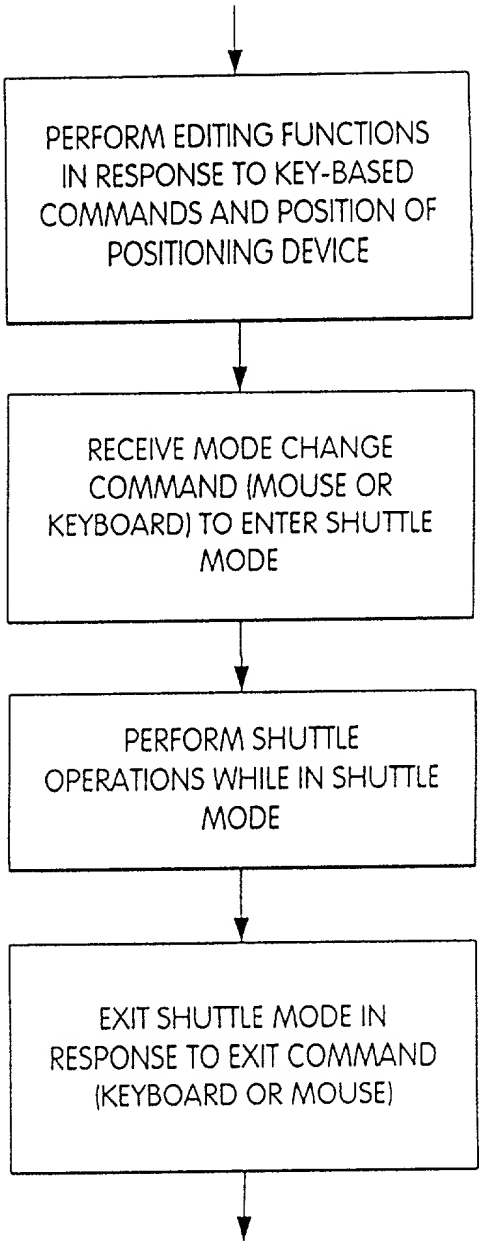
PERFORM EDITING FUNCTIONS IN RESPONSE TO KEY-BASED COMMANDS AND POSITION OF POSITIONING DEVICE
RECEIVE MODE CHANGE COMMAND (MOUSE OR KEYBOARD) TO ENTER SHUTTLE MODE
PERFORM SHUTTLE OPERATIONS WHILE IN SHUTTLE MODE
EXIT SHUTTLE MODE IN RESPONSE TO EXIT COMMAND (KEYBOARD OR MOUSE)

Fig. 5